

## CPVC CLAMPS




## STAND OFF TWO HOLE STRAP FOR CPVC

**FUNCTION:** Designed to position fire sprinkler pipe 1 1/2" (38mm) off the mounting surface eliminating the need for wooden spacer blocks. It can be mounted in both vertical and horizontal positions on concrete, steel and wood. Used as a hanger and pipe restrainer. Features flared edges to protect piping as it slides through the installed fitting.

**APPROVALS:** Complies with Underwriters' Laboratories (UL) & (cUL) (EX15649, 772), sizes 3/4" -2", shanghai vision mechanical. Complies with National Fire Protection Association (NFPA) 13.

**MATERIAL:** Carbon Steel, with mounting screws

**FINISH:** Zinc Electro-Galvanized

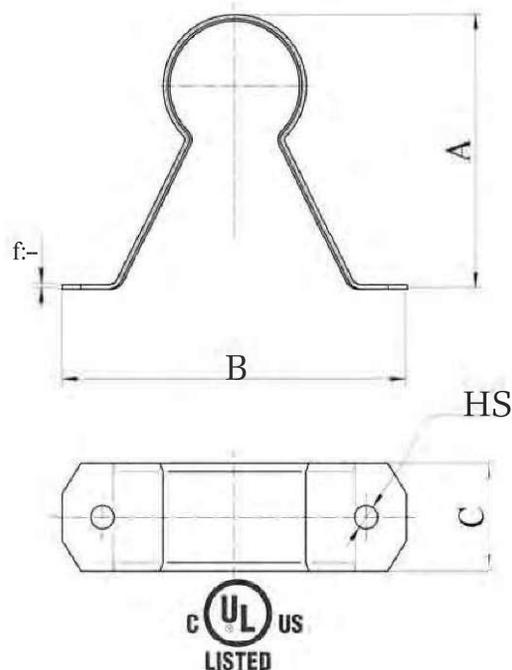

Pipe Size	Specification Data					Hanger Spacing
	HS	A	B	C	T	
3/4	1/5	211/16	3 5/8	1	18Ga	6 Max
1	1/5	215/16	3 11/16	1	18Ga	6 Max
1 1/4	1/5	3 5/16	3 5/8	1	16Ga	6 Max
1 1/2	1/5	3 7/8	4 1/2	1	16Ga	7 Max
2	1/5	4	5 1/4	1	16Ga	8 Max

This specification sheet is for reference only. Aimco International Group Corp. reserves the right to make changes to the design without prior notice.