


WAFER BUTTERFLY VALVE W/SWITCH

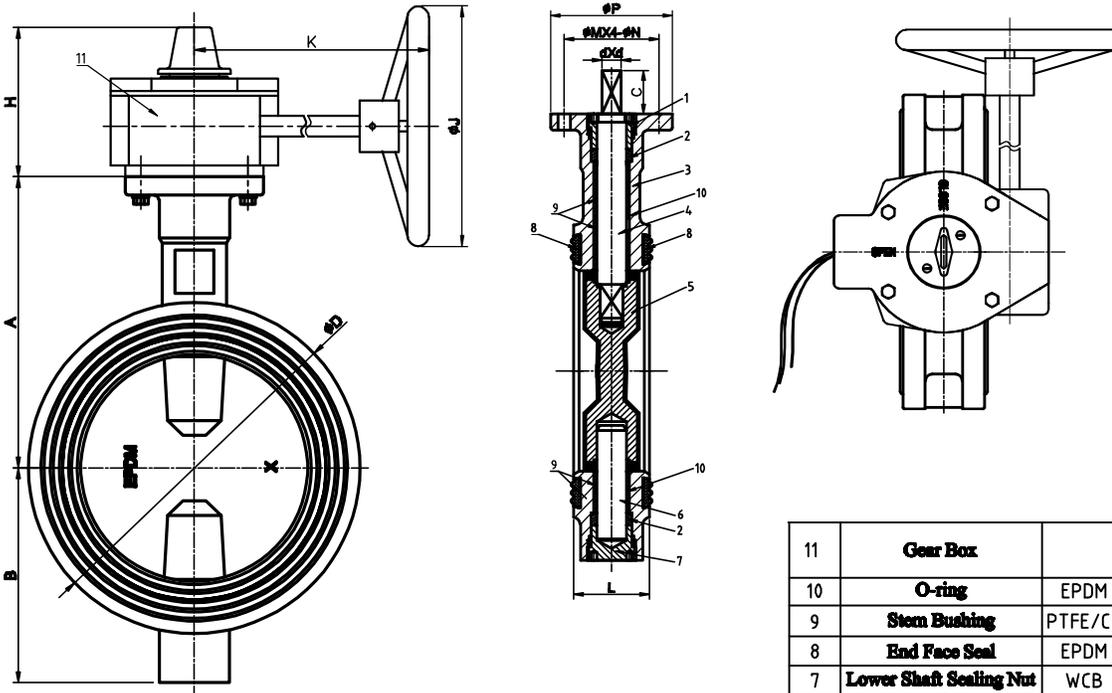

SIZE	A	B	C	D	H	K	J	P	M	N	d	L	
2.5"	125	95	32	112	111	153	218	152	90	70	9	10	44.2
3"	140	100	32	120	111	153	218	152	90	70	9	11	45.3
4"	160	100	32	161	111	153	218	152	90	70	9	14	52
5"	170	125	32	182	111	153	218	152	90	70	9	14	54.4
6"	190	140	32	216	111	153	218	200	90	70	9	16	55.8
8"	230	175	32	260	126	210	232	300	125	102	12	19	60.5

11	Gear Box			XHQD-00-00 or XHQD-00-00A
10	O-ring	EPDM	ASTM D2000	
9	Stem Bushing	PTFE/C954 (ONLY 8")		GD-381X-07-06
8	End Face Seal	EPDM	ASTM D2000	WD-371X-06
7	Lower Shaft Sealing Nut	WCB	ASTM A216	GD-381X-05-02
6	Lower Shaft	SS416	ASTM A582	GD-381X-03
5	Disc	DI+EPDM		GD-381X-02
4	Upper Shaft	SS416	ASTM A582	GD-381X-03
3	Body	DI	ASTM A536	WD-371X-01
2	Shaft Seal	EPDM	ASTM D2000	GD-381X-04
1	Upper Shaft Sealing Nut	WCB	ASTM A216	GD-381X-05-01
NO	Name	Material	Remark	Drawing Code

SIGNAL SWITCH SPECIFICATION :
1. MANUFACTURER: YUQING RENEW ELECTRONIC CO., LTD
2. BRAND: RENEW
3. RATING: IEC IP40
4. TYPE: RV-162-1C25

Carried Standard						Assembly Drawing			
Design Standard	API609	MAR	INDEX	FILE NO.	SIGN	DATE	Version No.	WEIGHT	SCALE
Face to Face Standard	ASME B16.1	DESIGNED				01			
Top Flange Standard	ISO 5211	CHECKED				PAGE			
Test Standard	API 598	CRAFT				PAGES			
		APPROVED				300PSI Wafer Butterfly Valves			