





## TWO HOLE STRAP FOR CPVC

**FUNCTION:** Designed to support CPVC fire sprinkler pipe horizontally from the side or bottom of beam. It can only be used as a guide on top of beam or on vertical piping, it also acts as a restrainer to prevent the thrust of a sprinkler head during activation when mounted on top of structure. It may be installed onto wood using supplied fasteners or into, minimum 20 gauge, steel using two 1/4" x 1" mounting screws. Features flared edges to protect piping as it slides through the installed fitting and retaining dimples to allow for easy installation onto pipe.

**APPROVALS:** Complies with Underwriters' Laboratories (UL) & (cUL) (EX15649, 770), sizes 3/4" - 2", shanghai vision mechanical

**MATERIAL:** Carbon Steel, with mounting screws

**FINISH:** Zinc Electro-Galvanized

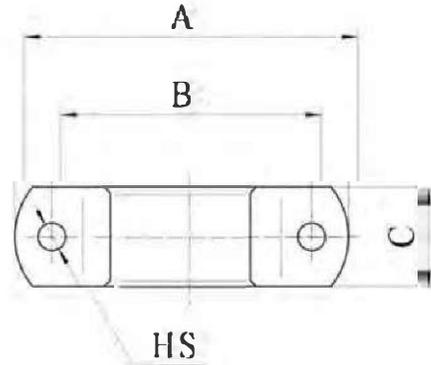

Pipe Size	Specification Data					Hanger Spacing
	OD	HS	A	B	C	
<b>3/4</b>	1.050	7/32	3 1/4	2 1/4	1 3/16	6 Max
<b>1</b>	1.315	7/32	3 1/2	2 1/2	1 3/16	6 Max
<b>1 1/4</b>	1.660	7/32	4 1/4	3 1/4	1 3/16	7 Max
<b>1 1/2</b>	1.900	7/32	4 7/16	3 7/16	1 3/16	7 Max
<b>2</b>	2.375	7/32	4 15/16	3 15/16	1 3/16	8 Max

This specification sheet is for reference only. Aimco International Group Corp. reserves the right to make changes to the design without prior notice.