

## CPVC CLAMPS




## WRAPAROUND STRAP FOR CPVC

**FUNCTION:** Designed to support CPVC fire sprinkler pipe horizontally from the side or bottom of beam. It must be installed with mounting tab oriented over top of piping on the side of a beam, it can only be used as a guide on top of beam or on vertical piping. It may be installed onto wood using supplied fasteners or into, minimum 20 gauge, steel using two 1/4" x 1" mounting screws. Features flared edges to protect piping as it slides through the installed fitting.

**APPROVALS:** Complies with Underwriters' Laboratories (UL) & (cUL) (EX15649, 769), sizes 3/4" - 2", shanghai vision mechanical

**MATERIAL:** Carbon Steel, with mounting screws

**FINISH:** Zinc Electro-Galvanized

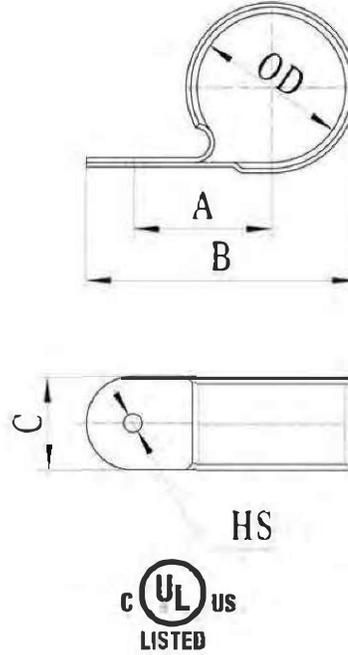

Pipe Size	Specification Data					Hanger Spacing
	OD	HS	A	B	C	
3/4	1.050	7/32	1 1/4	2 3/8	1 3/16	6 Max
1	1.315	7/32	1 7/16	2 11/16	1 3/16	6 Max
1 1/4	1.660	7/32	1 5/8	3 1/16	1 3/16	7 Max
1 1/2	1.900	7/32	1 3/4	3 5/16	1 3/16	7 Max
2	2.375	7/32	1 7/8	3 11/16	1 3/16	8 Max

This specification sheet is for reference only. Aimco International Group Corp. reserves the right to make changes to the design without prior notice.