

## CPVC CLAMPS


### SIDE MOUNT STRAP FOR CPVC

**FUNCTION:** Designed to support CPVC fire sprinkler pipe horizontally from the side or bottom of beam. It can only be used as a guide on top of beam or on vertical piping, it also acts as a restrainer to prevent the thrust of a sprinkler head during activation when mounted on top of structure. It may be installed onto wood using supplied fasteners or into, minimum 20 gauge, steel using two 1/4" x 1" mounting screws. Features flared edges to protect piping as it slides through the installed fitting and retaining dimples to allow for easy installation onto pipe.

**APPROVALS:** Complies with Underwriters' Laboratories (UL) & (cUL) (EX15649, 771), sizes 3/4" - 2", shanghai vision mechanical

**MATERIAL:** Carbon Steel, with mounting screws

**FINISH:** Zinc Electro-Galvanized

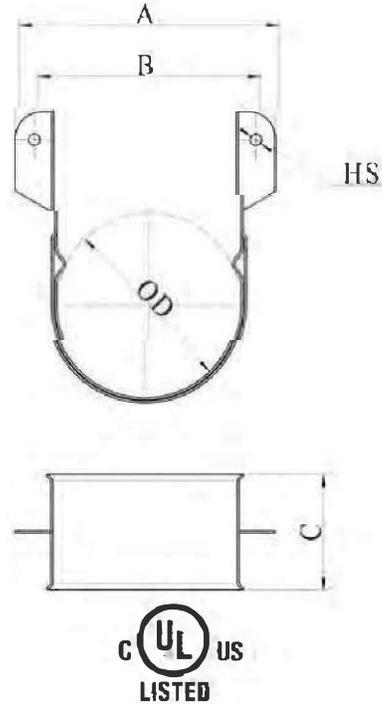

Pipe Size	Specification Data					Hanger Spacing
	OD	HS	A	B	C	
3/4	1.050	7/32	2 5/16	1 11/16	1 3/16	6 Max
1	1.315	7/32	2 5/8	1 15/16	1 3/16	6 Max
1 1/4	1.660	7/32	2 15/16	2 5/16	1 3/16	7 Max
1 1/2	1.900	7/32	3 3/16	2 1/2	1 3/16	7 Max
2	2.375	7/32	3 5/8	3	1 3/16	8 Max

This specification sheet is for reference only. Aimco International Group Corp. reserves the right to make changes to the design without prior notice.