


SPLIT RING HANGER HINGED

FUNCTION: Designed for the suspension of non-insulated stationary pipe lines in either a horizontal or vertical position. The hinged design allows for a quick installation.

APPROVALS: Complies with Manufacturers' Standardization Society (MSS) SP-58 & SP-69 (Type 12). Complies with Federal Specifications A-A-1192A (Type 12).

MATERIAL: Malleable Iron, with hardware

FINISH: Available in Plain and Zinc Electro-Galvanized

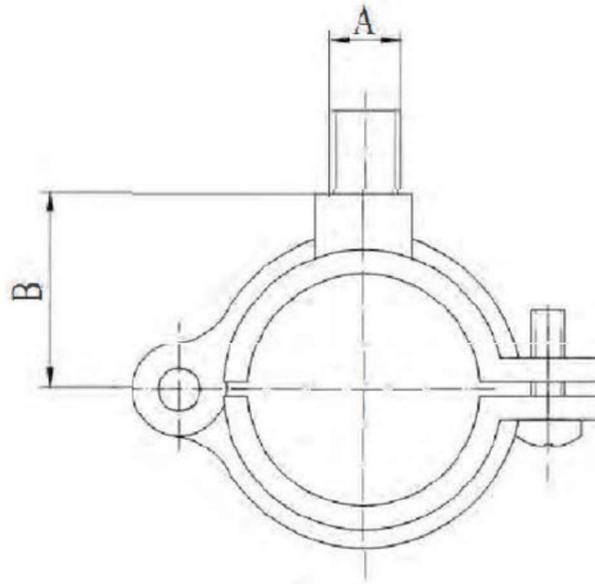

Iron Pipe Size	Specification Data		Rec. Max. Load (lbs.)	Approx. Wt. Per 100 (lbs.)
	Rod Size A	B		
3/8	3/8	13/16	180	10
1/2	3/8	7/8	180	13
3/4	3/8	1	180	14
1	3/8	1 1/8	180	16
1 1/4	3/8	1 5/16	180	22
1 1/2	3/8	1 7/16	180	24
2	3/8	1 11/16	180	31
2 1/2	1/2	2 1/8	300	60
3	1/2	2 7/16	300	74
4	1/2	2 3/4	300	85

This specification sheet is for reference only. Aimco International Group Corp. reserves the right to make changes to the design without prior notice.