


# STANDARD CLEVIS HANGER

**FUNCTION:** Designed for suspension of non-insulated stationary pipe lines allowing for vertical adjustment.

**CERTIFICATIONS:** Complies with Manufactures' Standardization Society (MSS) SP-58 & SP-69 (Type 1). Complies with Federal Specifications A-A-1192A (Type **1**). Complies with Underwriters' Laboratories (UL) & (cUL) {EX16266, 24Z}, 3/4" -8" UL & cUL approved, 3/4" -6" Factory Mutual (FM) approved. {EX15150, PH703}, shanghai vision mechanical, (EX15800, LXCH), zhejiang lianxiang hardware

**MATERIAL:** Carbon Steel, Stainless Steel available

**FINISH:** Zinc Electro-Galvanized,

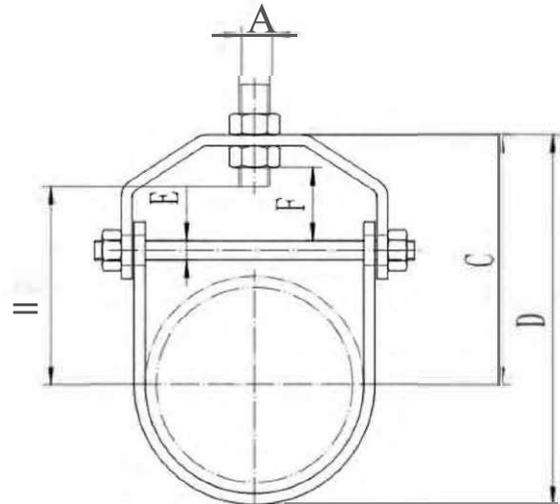

Iron Pipe Size	Specification Data								Rec. Max. Load (lbs.)	Approx. Wt. Per 100 (lbs.)
	A	B	C	D	E	F	Upper	Lower		
1/2	3/8	11/8	111/16	2 1/16	1/4	7/16	13Ga x 7/8	13Ga x 7/8	610	18
3/4	3/8	11/8	111/16	2 9/16	1/4	7/16	13Ga x 7/8	13Ga x 7/8	610	18
1	3/8	15/16	2 1/16	2 11/16	1/4	5/8	13Ga x 7/8	13Ga x 7/8	610	22
1 1/4	3/8	15/8	2 1/2	3 3/16	1/4	7/8	13Ga x 7/8	13Ga x 7/8	610	26
1 1/2	3/8	1 7/8	2 7/8	3 11/16	1/4	11/16	12Ga x 7/8	12Ga x 7/8	610	34
2	3/8	2 1/4	3 5/16	4 7/16	1/4	11/4	12Ga x 7/8	12Ga x 7/8	610	38
2 1/2	1/2	2 7/8	4 1/2	5 7/8	5/16	115/16	9Ga x 1 3/16	10Ga x 1 3/16	1130	86
3	1/2	3 5/16	4 3/4	6 1/2	5/16	13/4	9Ga x 1 3/16	10Ga x 1 3/16	1130	96
3 1/2	1/2	4 1/32	5 7/8	7 15/16	5/16	2 9/16	8Ga x 1 3/16	10Ga x 13/16	1130	114
4	5/8	4 1/8	5 15/16	8 3/16	3/8	2 1/8	8Ga x 1 3/16	10Ga x 13/16	1430	126
5	5/8	4 3/16	5 11/16	8 7/16	1/2	17/16	4Ga x 1 1/4	8Ga x 1 1/4	1430	204
6	3/4	5 1/16	6 13/16	10 1/8	1/2	13/4	3Ga x 1 1/2	8Ga x 1 1/2	1940	280
8	3/4	6 3/16	8 1/16	12 7/16	5/8	17/8	3Ga x 1 3/4	8Ga x 1 3/4	2000	446