





LynCar's Swing Check valves are rubber seated for Fire Protection use.

Material Specifications

Number	Part Name	Material(s)
1	Name Plate	Aluminum (A1100)
2	Cap	Brass (ASTM-UNS B584 C 85710)
3	Disc	Brass (ASTM-UNS B584 C 85710)
	Disc Holder	Brass (ASTM-UNS B584 C 85710)
4	Seat Packing	Rubber (NBR) FN80(4) Teflon (POLYFLON PTFE M-392)
5	Washer	Brass (ASTM-UNS B16 C36000)
		Brass (ASTM-UNS B584 C 85710)
6	Seat Nut	Brass (ASTM-UNS B16 C36000)
7	Pin	Brass (ASTM-UNS B124 C 37700)
8	Lock Bolt	Brass (ASTM-UNS B16 C 36000)
9	Body	Brass (ASTM-UNS B584 C 85710)

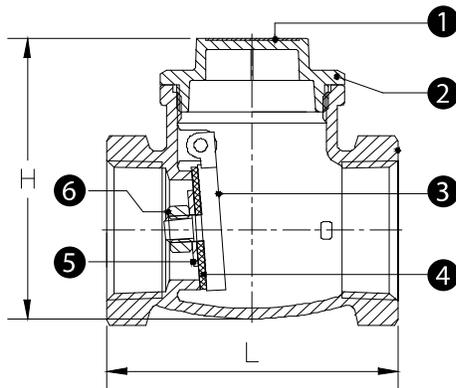

- > LynCar's Swing Check Valve
- > 200 WOG valve
- > Rubber Seated for Fire Protection use
- > Cast brass body IPS Threaded

Size Specifications

PART	SIZE	'L' (mm)	'H' (mm)
8078012	1/2"	53	36
8078034	3/4"	60	39.5
8078100	1"	66.5	45
8078114	1¼"	81	52.5
8078112	1½"	90	55
8078200	2"	107	69.5