


## CONCEALED FIRE DEPARTMENT CONNECTIONS

### Fire Department Connections Recessed Body

#### 70229-1 Straight Body

4" (100mm) grooved x 2.5" (65mm) NPT x 2.5" (65mm) NPT cast brass recessed straight body fire department connection. The 70229-2 body is a double drop clapper Siamese and is used as an auxiliary connection and allow up to 500 GPM to supplement the system water supply for fire protection. The body of the Siamese with its independent self-closing clapper valves can be placed inside the building or if space prevents, can be built into the wall of the building during construction.

UL / ULCAproved

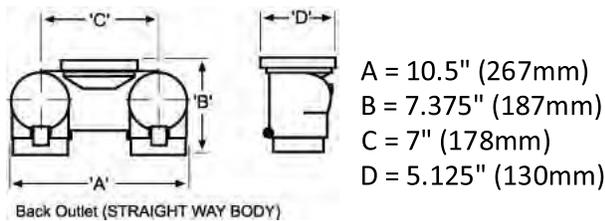

#### 70229-2 Angle Body

4" (100mm) grooved x 2.5" (65mm) NPT x 2.5" (65mm) NPT cast brass recessed body fire department connection. The 70229-2 body is a double drop clapper Siamese and is used as an auxiliary connection and allows up to 500 GPM to supplement the system water supply for fire protection. The body of the Siamese with its independent self closing clapper valves can be placed inside the building or if space prevents, can be built into the wall of the building during construction.

UL / ULCAproved

