


FIRE HOSE VALVE WITH HYDROLATOR 1½"



300 lbs (2068 kPa) pressure tested approved valve. Heavy Duty 1-1/2" (38 mm) angle hose and hydrolator valve. Automatically drains and vents, safeguarding against hose deterioration. O-ring packing and red cast handle. Forgeline Bonnett and Seat Assembly. UL/ULC listed and FM Approved.

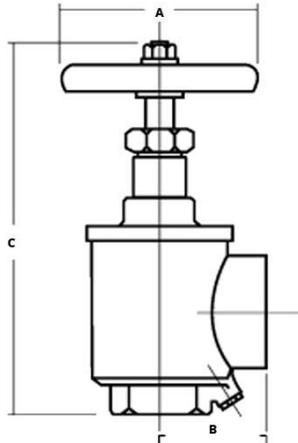

- A = 4.0"
- B = 2.75"
- C = 8.0" (OPEN)
- C = 7.0" (CLOSED)

PART	DESCRIPTION	FINISH
707024	1½" Fire Hose Valve With Hydrolator, F X F	Brass
707024MF	1½" Fire Hose Valve With Hydrolator, F X M	Brass
707026	1½" Fire Hose Valve With Hydrolator, F X F	Chrome
707026MF	1½" Fire Hose Valve With Hydrolator, F X M	Chrome