

BRASS FIRE HOSE VALVE 2.5"

2.5" Standard Angle Hose Valve. 2.5" Female Inlet x 2.5" Male Hose Thread Outlet.




Heavy Duty 2-1/2" (65 mm) angle hose, 300 lb (2070 KPa) pressure tested approved valve. Lightweight cast brass body, Forgeline Bonnett and Seat Assembly. UL/ULC listed and FM Approved. Specify regional hose thread for outlet.

FINISH: Cast Brass

OPTIONS: Polish Brass, Cast Chrome, Polish Chrome

HOSE THREADS AVAILABLE: CSA, BCT, WCT, QST, NSST, NPSH,

Dimensions:

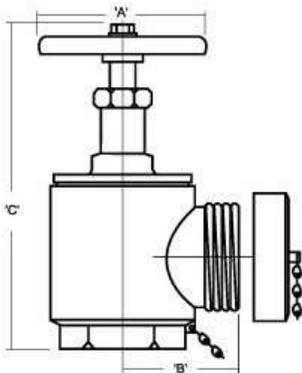

A=5" (125mm)

B=3 3/16" (79mm)

C=11" (OPEN) (275mm)

C=9 1/4" (CLOSED) (231mm)

Weight: 9lbs (4.09 Kg)

Working Pressure: 300lb (2070 Kpa)